


### SEALED TRANSFORMER WITH PTC CMP SERIES


#### FEATURES

- CQC Approved:  
CQC file No.CQC13001094903
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:  
INPUT:230V 4200Vrms  
INPUT:115V 2800Vrms
- Operation Frequency:50/60Hz
- Resin Class B IEC 85  
(20,000 h Testing to IEC 216)
- 100% Production Tested



#### ORDERING CODE

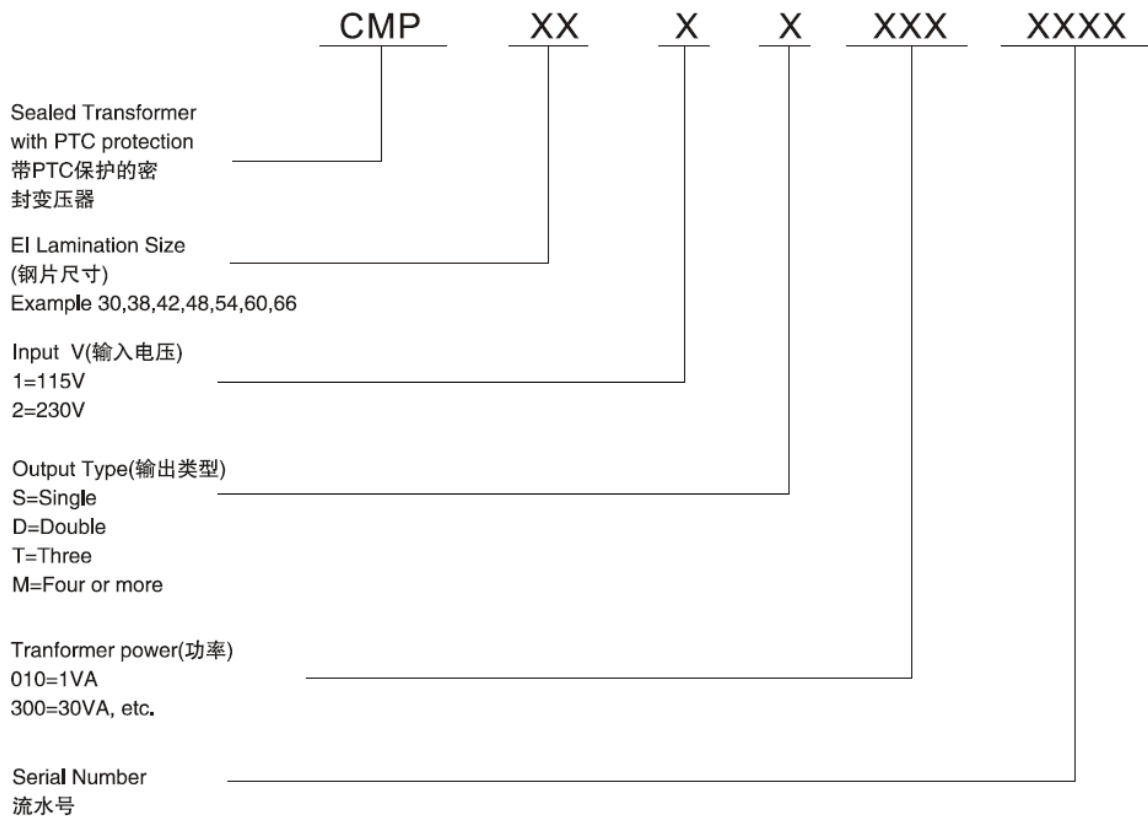

### OUTLINE DIMENSIONS

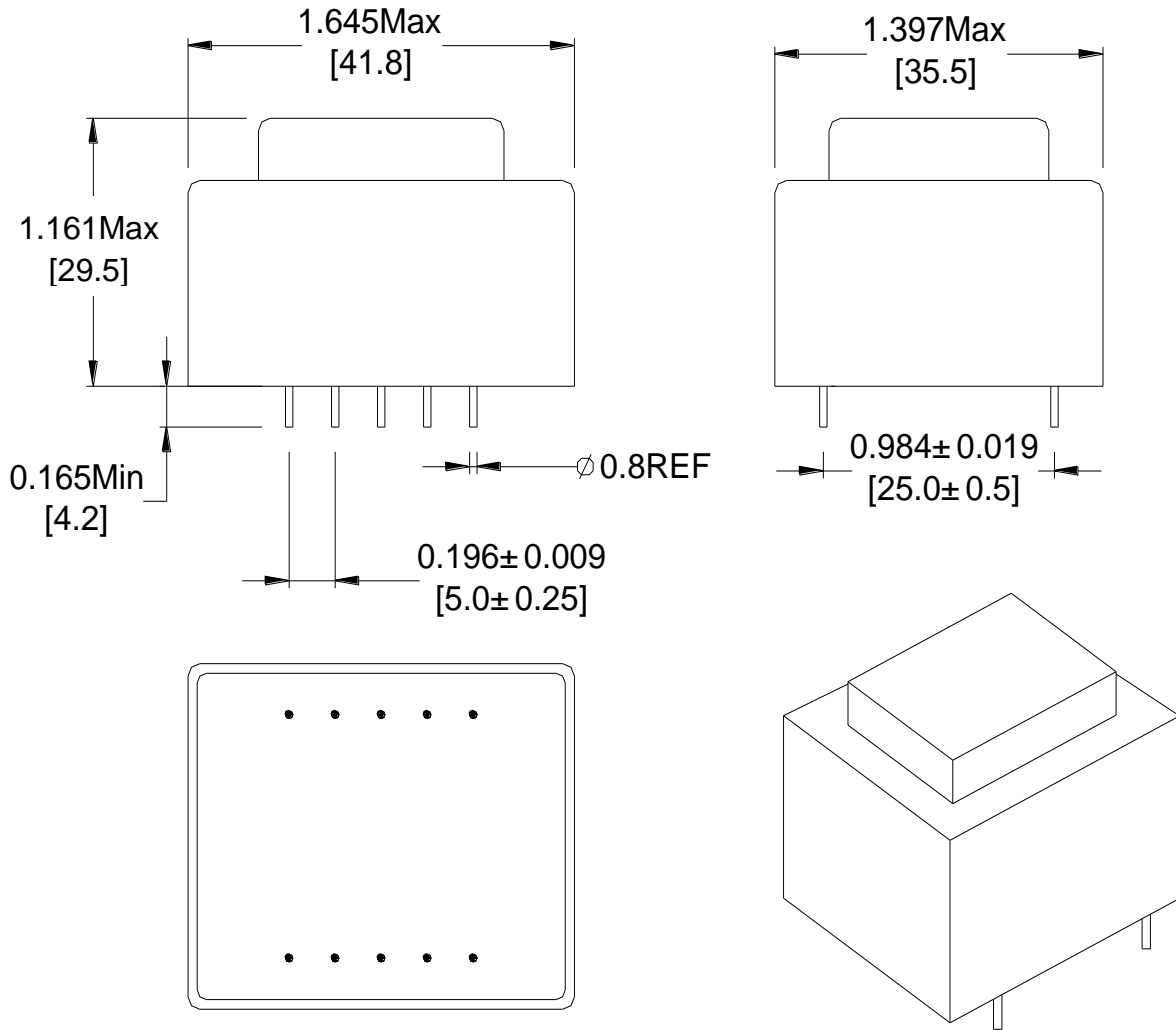

### SCHEMATIC DIAGRAM:

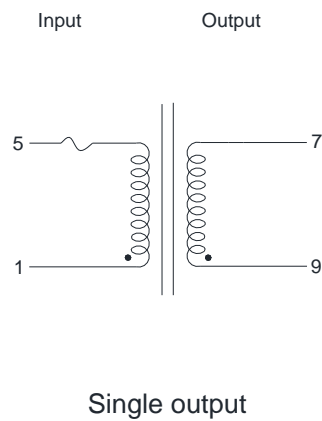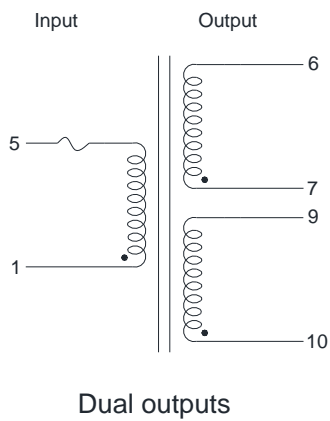

### ELECTRONIC SPECIFICATIONS

Order Number	Input Voltage (Vac)	No-load Voltage (Vac)	SEC. Voltage (Vac)	Rated Current (mA)	Rated Power (VA)	Ambient TEMP. (°C)	Weight (g)	Certificate	
								CQC	CE
CMP382S0320601	220V	8	6	533	3.2VA	T 70 B	150g		
CMP382S0320901	220V	12	9	356	3.2VA	T 70 B	150g		
CMP382S0321001	220V	14	10	320	3.2VA	T 70 B	150g		
CMP382S0321201	220V	16	12	267	3.2VA	T 70 B	150g		
CMP382S0321501	220V	20	15	213	3.2VA	T 70 B	150g		
CMP382S0321801	220V	24.1	18	178	3.2VA	T 70 B	150g		
CMP382S0322401	220V	32.4	24	133	3.2VA	T 70 B	150g		
CMP382D0320601	220V	2X8.0	2X6	2X267	3.2VA	T 70 B	150g		
CMP382D0320901	220V	2X12.0	2X9	2X178	3.2VA	T 70 B	150g		
CMP382D0321001	220V	2X14	2X10	2X160	3.2VA	T 70 B	150g		
CMP382D0321201	220V	2X16.0	2X12	2X133	3.2VA	T 70 B	150g		
CMP382D0321501	220V	2X20	2X15	2X107	3.2VA	T 70 B	150g		
CMP382D0321801	220V	2X24.1	2X18	2X89	3.2VA	T 70 B	150g		
CMP382D0322401	220V	2X32.4	2X24	2X67	3.2VA	T 70 B	150g		